

## **VSE 3000 Volume Static Eliminator**



***The Chapman VSE 3000 Volume Static Eliminator (manufactured by SIMCO) is an efficient workstation ionizer which effectively eliminates electrostatic charges quickly and reliably. The VSE 3000's variable speed fan and integral air flow diffuser floods the entire workstation with static eliminating ions for superior performance.***

Reliable ion balance is maintained even during input voltage fluctuation occurrences. The VSE 3000's patented self-balancing circuitry maintains a balance range of 0+/-5V. Exceptionally quiet, the unit delivers a powerful air flow with low energy loss. Noise levels are low due to sophisticated sound absorbing materials. An individually-controlled heater provides operator comfort. The VSE 3000 can also be mounted overhead or on walls. Optional air filter if required.

### **Features**

- Self-balancing circuit for reliable 0 +/-5V balance
- Long-life emitter points
- Removable emitter assembly for fast, efficient cleaning
- Rugged enclosure



*Individual heater and fan speed controls.*

### **Benefits**

- Powerful, precisely-controlled airflow even at slow speed
- Individually controlled heater provides operator comfort
- Wide-angle air diffuser spreads ions for ideal work surface coverage

### **Typical Applications:**

- Electronics Assembly
- Disk Drive Assembly
- Medical Device Assembly

# VSE 3000 Volume Static Eliminator

## Specifications

### Part Numbers

VSE 3000, . . . . . 10735-001

115V, 60 Hz, UL listed

VSE 3000, . . . . . 10735-014

230V, 50 Hz, CE compliant

Replacement Filter Kit . . . . 10790CC  
(5 filters and holder)

### Discharge Time

<1.0 sec (1000 V to 100 V) at 12"

### Size

12" W X 6.25" H x 10" D

(305 mm W x 159 mm H x 254 mm D)

### Footprint of Stand

12.5" x 5.5" (316 x 140 mm)

### Weight

8 lbs. (3.6 kg.)

### Air Volume Output

Variable: 80 to 160 cubic ft/min

(38 to 76 liters/sec)

### Air Velocity

550 ft/min at 2 ft at max fan speed

(2.8 m/sec at 0.6 m)

### Power

35 Watts with heater off;

435 Watts with heater on

### Angle of Ionized Air Coverage

60 degrees

### Effective Coverage

2' x 4' Area

### Ion Balance (offset voltage)

0V  $\pm$ 5V self-balancing at all normal conditions

### Operating Temperature Range

32° F (0° C) to 122° F (50° C)

### Heated Air Temperature

Fan Speed

Above Ambient

Minimum

16° F (8.8° C)

Maximum

8° F (4.4° C)

### Ozone Production

<0.05 ppm per UL 867

### EMI/RFI

Complies with FCC Part 15 Requirements for Class A equipment

### Noise Level


Fan Speed High: 63 dB(A) max, measured 2 ft. (61 cm) from unit

### Enclosure

G.E. Noryl (polyphenylene oxide), enameled


## VSE 3000 Performance

Each region represents a discharge time of less than 10 seconds. Discharge time determined per EOS/ESD Association Standard 3, 1000 Volts to 100 Volts

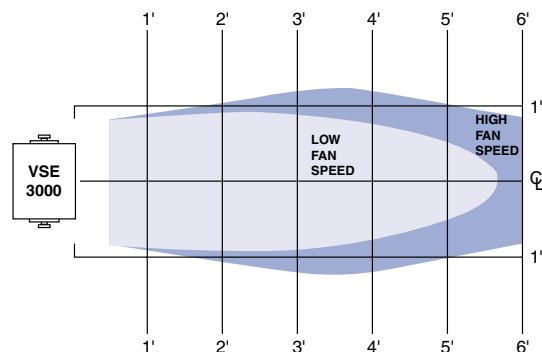

## Charge Decay Efficiency

Discharge time determined as per EOS/ESD Association Standard 3, using 6" x 6", 20 pF plate (charged plate monitor). Discharge times are in seconds from 1000 V to 100 V. (Discharge times slightly longer for 230 V, 50 Hz.)

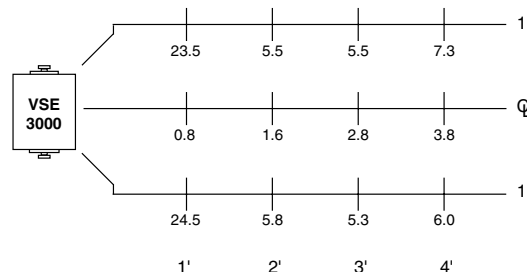

## Static Control and Cleanroom Products

SIMCO  
Static Control and Cleanroom Products  
2257 North Penn Road  
Tel: 215.822.2171  
800.538.0750  
Fax: 215-997-3450  
www.simco-static.com  
email: simco@itw.com

YOUR LOCAL REPRESENTATIVE



Specifications subject to change without notice. September 1999 Copyright © 1999 SIMCO

SPEC012 Printed in U.S.A.

♻️ Printed on Recycled Paper